

CA AUTOMATIC PAPER CUP MACHINE

MACHINE THAT DISPENSE PAPER CUPS, MOULDS OR OTHER CONTAINERS ONTO THE CONVEYOR BELT TO THEN BE FILLED WITH THE PRODUCT

CUPS LOADER

Easy loading of capsules without interrupting production. Detachable and interchangeable.



DISPLAY

Configure all of the machine's functions in a simple and visual way.




CONVEYOR AND TRAYS

Customisable, according to kind of trays or containers to be deposited.


TRAY LOADER




A tray loader can be integrated.



FORMEX

FORMEX MAQUINARIA S.A.
Vic 32, Nave 5
08120 La Llagosta
BARCELONA - ESPAÑA

formex@formex.es
Tel. +34 93 398 43 50
 +34 656800210

 www.formex.es
 Formex Maquinaria
 [formexmaquinariapasteleria](https://www.youtube.com/formexmaquinariapasteleria)

FABRICAMOS SOLUCIONES PARA DOSIFICAR TU PRODUCTO





GENERAL CHARACTERISTICS

- ☑ Machine suitable for when you want to stop having to transfer trays and place paper cups.
- ☑ They provide a **precise positioning and centering of the mould** for the dosing process.
- ☑ Easy to load without interrupting production.
- ☑ **The paper loaders are designed to fit the paper capsule used by the customer.** It is possible to have multiple loaders and use the machine to handle different types of capsules.
- ☑ **Double movement of separation and capture for a better grip on the capsule.**
- ☑ All parts of the machine that come in contact with the dough are made of materials suitable for food use and AISI304 stainless steel.
- ☑ For automatic productions and/or those with a higher degree of automation as it is normally coupled to a conveyor belt or production line.
- ☑ The machine are sturdy and being built to work 24 hours. It needs no maintenance (no greasing).
- ☑ **HMI PANEL FOR INTELLIGENT PRODUCTION MANAGEMENT:** controls all machine functions, programming and production. During production, parameters such as tray feed and mould positioning, independent regulation of speeds and suction time, independent drive, etc., can be modified.



TECHNICAL DATA SHEET

MODEL	CA 40	CA 45	CA 60	CA 65	CA 80
Production	Max speed: 3.3 seconds/cycle (variable value according to paper type)				
Cupper units	to choose				
Trays (cm)	40	45	60	65	80
Dimension WxLxH(cm)	100x90x168	105x60x168	120x90x168	125x95x168	140x95x168
Weight (kg)	255	280	315	325	350
Motorization	1 motor of 0,18 Kw + 1 motor of 0,75 Kw - 220 V				
Electrical consumption	2 Kw máx. - 220 V				
Air consumption	6 bar				
Pressure (compressor required)	200-800 l/min (variable value according to paper type)				

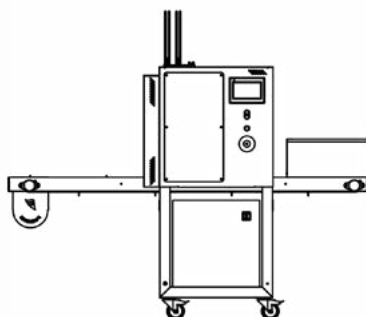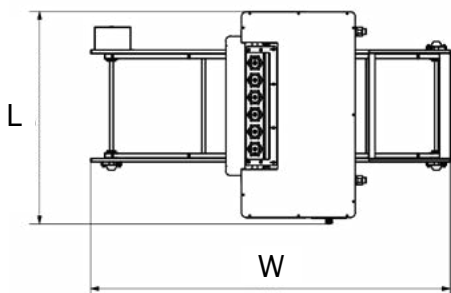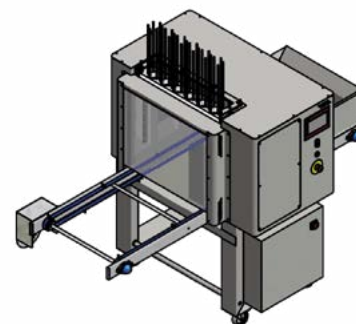

Due to constant technological development, the characteristics of our products may be altered without prior notice.

SEE PRODUCT
ON WEBSITE

